





Multipurpose grapple for rigid mounting

- High closing force: perfect balance due to the central cylinder design
- Tines made of wear-resistant steel HB400 and available in 2 versions with 4 and 7 tips.
- Large opening and reduced overall dimensions when closed.
- Main frame made of high tensile steel, suitable to heavy-duty applications.



GRP 300-7

Model	Excav. Weight Ton.	Cap. m ³	Self weight Kg.	Lifting capacity daN	MAX BAR	Ø A mm	B mm	C mm	D mm	E mm	F mm	G mm
GRP 200-4	3 - 7	0,2	190	1500	250	80	485	635	1340	418	410	730
GRP 200-7	3 - 7	0,2	220	1500	250	80	485	635	1340	418	410	730
GRP 300-4	6 - 12	0,3	350	1750	250	100	610	750	1550	572	500	850
GRP 300-7	6 - 12	0,3	395	1750	250	100	610	750	1550	572	500	850
GRP 400-4	9 - 16	0,4	410	2000	250	120	715	885	1805	650	570	980
GRP 400-7	9 - 16	0,4	490	2000	250	120	715	885	1805	650	570	980

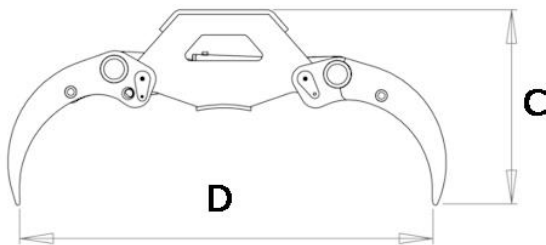

Accessories

GRI 10 T/SFF	Hydraulic rotator for rigid mounting
GRI 12 T/P	Hydraulic rotator for rigid mounting
GRI 18 T/P	Hydraulic rotator for rigid mounting
Adapter	Custom-made adapter for rigid mounting on excavators